
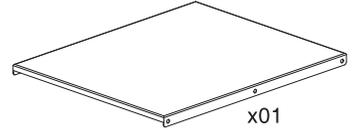






CONTENTS


- 04 Caster Wheels - Two Standard + Two with Brakes
- 01 Table Top
- 01 Side Rack A
- 01 Side Rack B
- 05 Supporting Cross Bars
- 10 Hex Bolts
- 10 Lock Washers
- 10 Washers



*Contents are not to scale to each other


1 ATTACH THE TABLE TOP

- Place the table top flat on the ground
- Place cross bars on table top and align holes with the side frame
- Align the holes of the side frames with the tabletop and cross bars and connect with washer, lock washer, and hex bolt.
- >> Repeat on other side frame

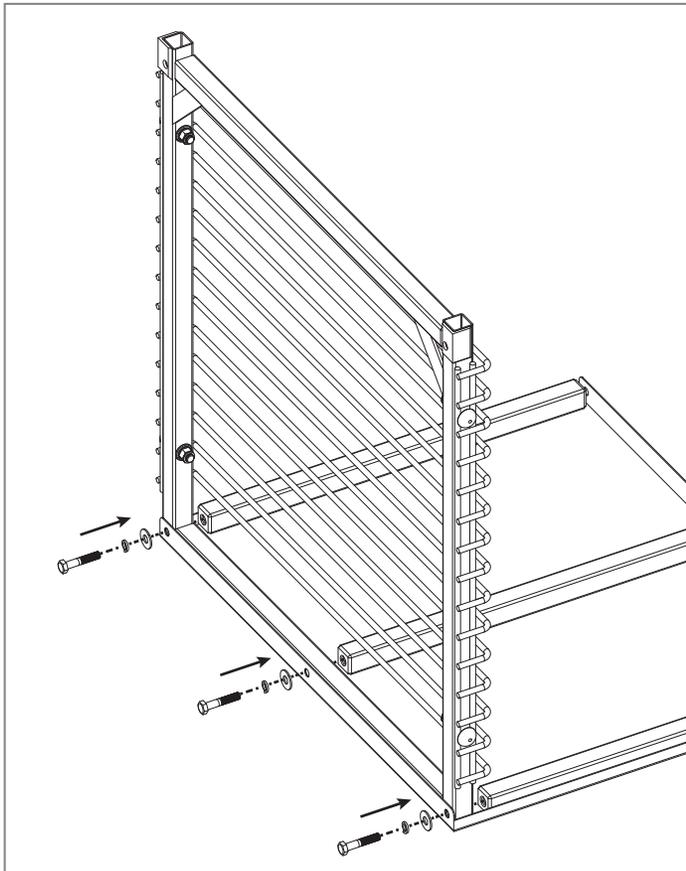


2 ATTACH CASTER WHEELS

- While assembled rack is laying flat, insert caster and cross bar onto bottom of rack.
- Connect with hex bolt, lock washer, and washer into side of rack and through caster mount, and hand tighten.
- Repeat for remaining caster wheels.

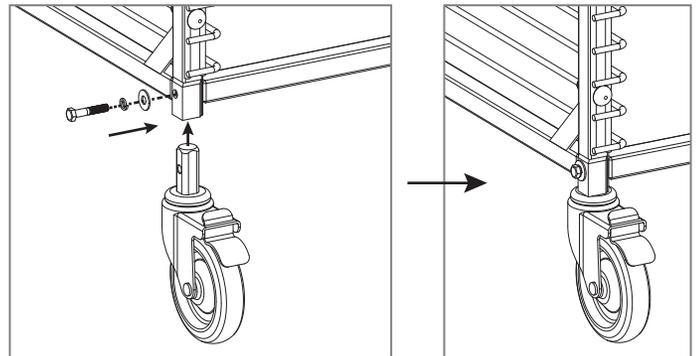

NOTE:
Mount the two casters with brakes together on the same end (either front or back).

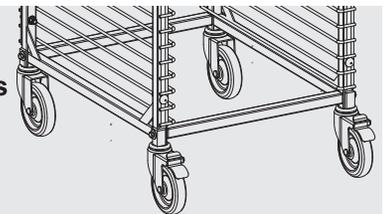

3 FINAL CHECK

- Stand the rack upright on a level surface/floor.
- All casters must be touching the floor evenly.
- Firmly tighten all bolts to ensure they are secure.



CAUTION

DO NOT OVERTIGHTEN BOLTS.

Overtightening may cause stripped threads and the bolt will not function properly.